
BUSTER-5

Carcass Splitting Bandsaw Electric

Product Brochure



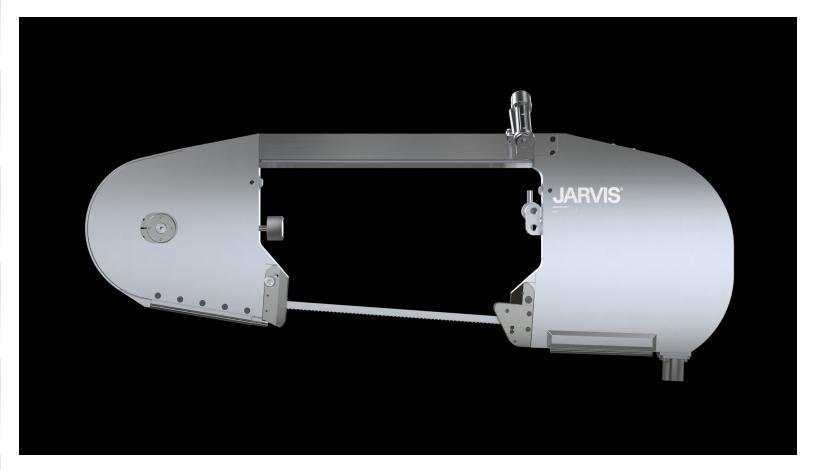

Jarvis Products Corporation 33 Anderson Road Middletown, CT 06457 United States of America

www.jarvisproducts.com sales@jarvisproducts.com T 860-347-7271 F 860-347-6978


BUSTER-5

Carcass Splitting Bandsaw Electric

Product Brochure





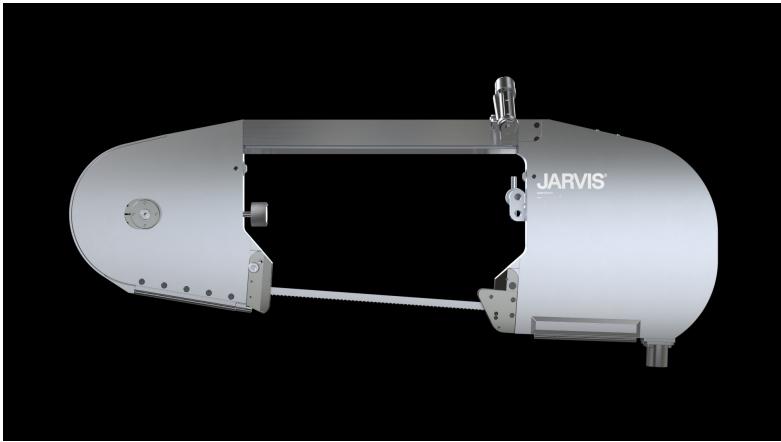



Jarvis Products Corporation 33 Anderson Road Middletown, CT 06457 United States of America

www.jarvisproducts.com sales@jarvisproducts.com T 860-347-7271 F 860-347-6978

Descriptions

- Used worldwide for splitting fat cattle, bulls, oxen, and horses.
- The largest Jarvis splitting saw; suited for the largest carcasses.
- Superior blade life: 400-600 carcasses per blade.
- Best possible hygiene spoked wheels, flat surfaced housings and completely opening doors - for fast, easy and complete cleaning.
- The drive system is oil bath lubricated for sustained trouble-free operation.
- Designed for the operator ultra-thin rail for unobstructed vision and dual rear handles for comfort.
- Anti-tie down controls and totally enclosed electric motor for operator safety.
- Meets national and international requirements for hygiene and safety.

Specifications		
BUSTER-5		
Drive		Electric
Motor Power	2500 W	3.3 hp
	3730 W	5 hp
Operating Voltage	460 / 230 V, 3 phas	
		other voltages and 50 Hz available
Capacity		180 head / hour
Control Handles		Electric Dual Anti-tie Down
Distance between Guides	502 mm	19.75 in
Blade Length	3226 mm	127 in
Overall Length	1448 mm	57 in
Drive Wheel Speed		530 rpm
Vibration (less than)	0.6 m / sec ²	115 dB
Weight	88.9 kg	196 lbs

Equipment Selection and Accessories		
		Order Number
BUSTER-5 (2500 W / 3.3 hp)	460 / 230 V, 3 phase, 60 Hz	4006033
	380 / 220 V, 3 phase, 50 Hz	4006057
	42 V, 3 phase, 50 Hz	4006036
BUSTER-5 (3730 W / 5 hp)	460 / 230 V, 3 phase, 60 Hz	4006172
	380 / 220 V, 3 phase, 50 Hz	4006247
	3226 mm / 127 in - Standard	1023159
Blade Options	3226 mm / 127 in - Cut Tooth	1023338
	3226 mm / 127 in - JET Blade	1023620
		4042052
Spring Balancer	2743 mm / 108 in travel, 1219 mm / 48 in cylinder (overall length)	4042016
Air Balancer	2743 mm / 108 in travel, 3048 mm / 120 in cylinder (overall length)	4042020

