


SPC-165

General Purpose Breaking Saw
Pneumatic

Product Brochure

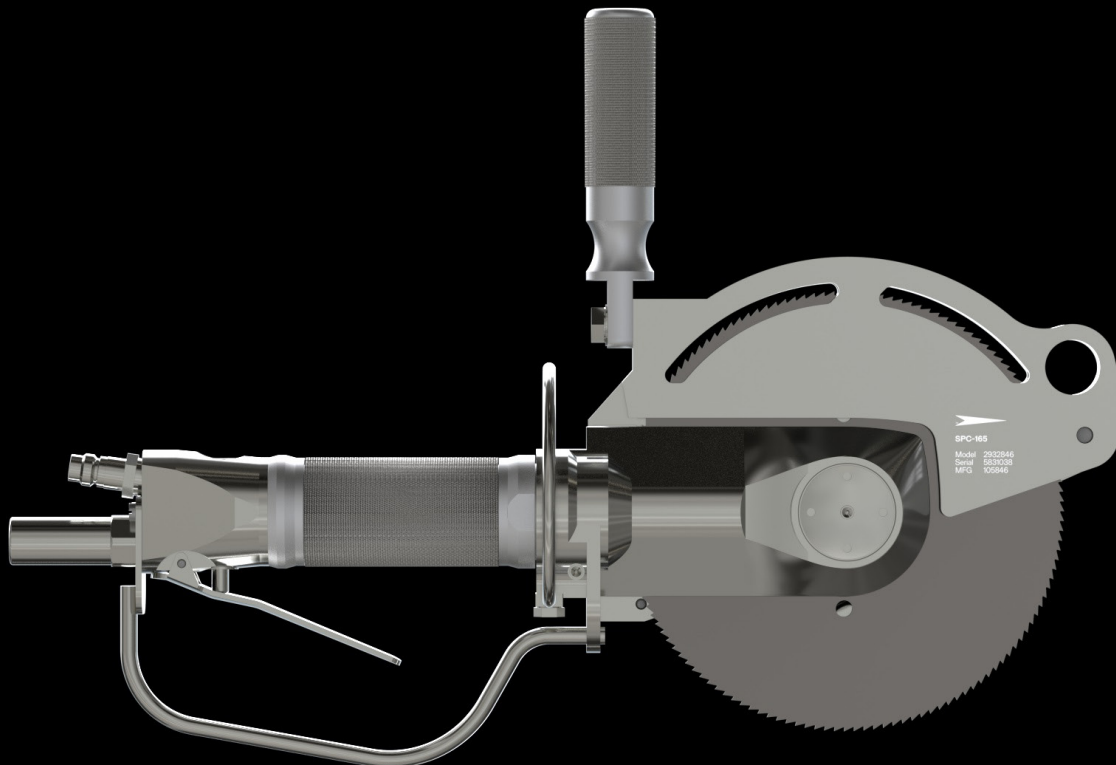

JARVIS[®]



Jarvis Products Corporation
33 Anderson Road
Middletown, CT 06457
United States of America

www.jarvisproducts.com
sales@jarvisproducts.com
T 860-347-7271
F 860-347-6978

SPC-165

General Purpose Breaking Saw
Pneumatic

Product Brochure

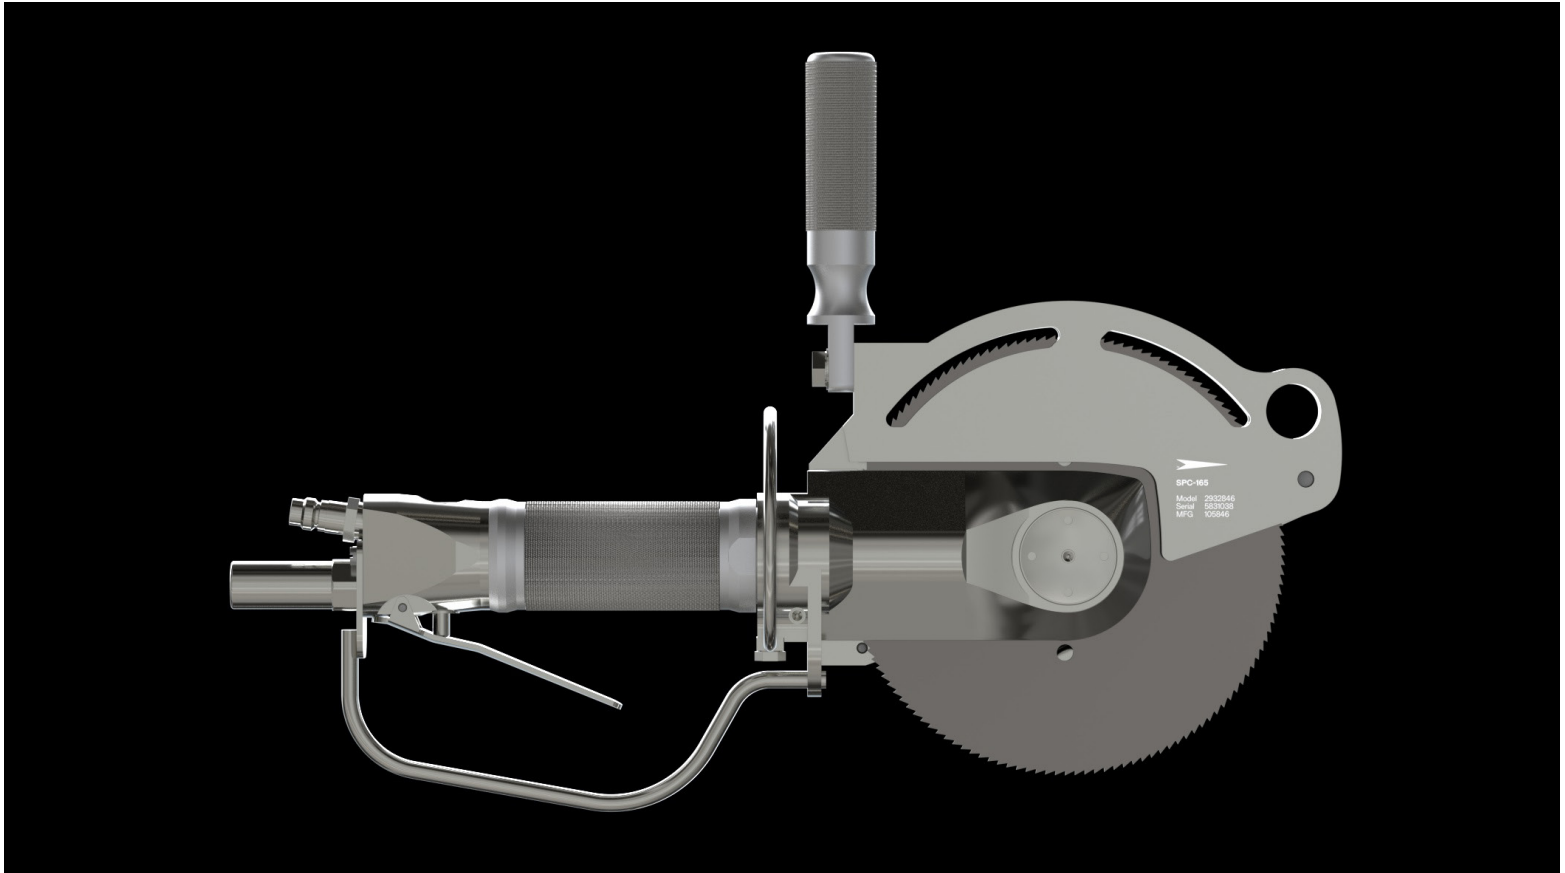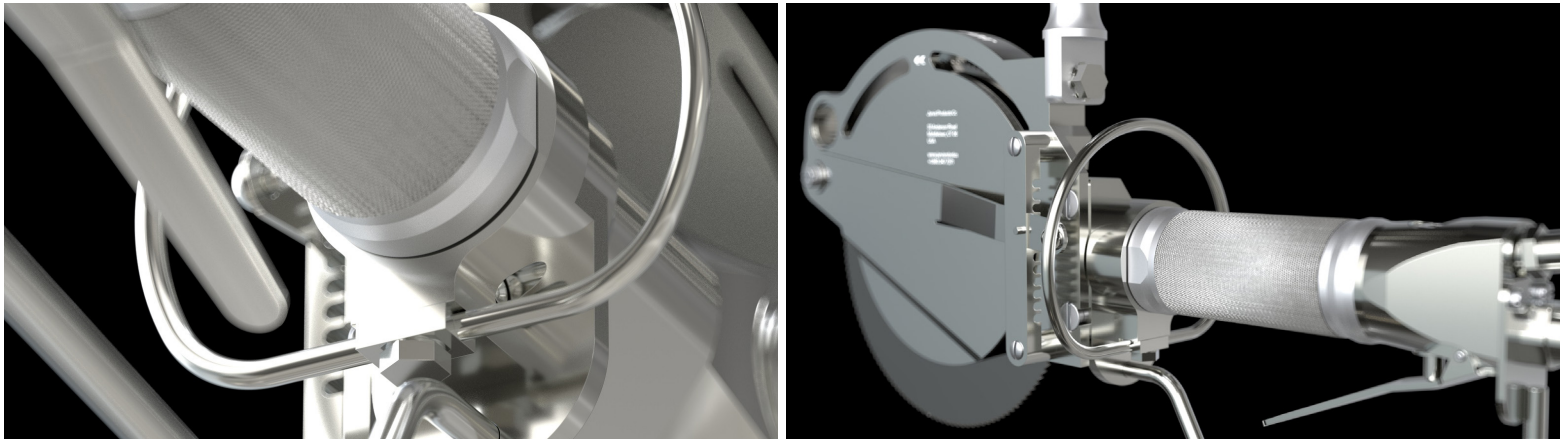

JARVIS®

Jarvis Products Corporation
33 Anderson Road
Middletown, CT 06457
United States of America

www.jarvisproducts.com
sales@jarvisproducts.com
T 860-347-7271
F 860-347-6978

Descriptions

- The SPC 140, with a 38.1 mm (1.5 in) cutting depth, or SPC 165 with a 50.8 mm (2 in) cutting depth, are ideally suited for:
 - Beef: Breaking forequarters and beef plates; also hot and cold ribbing.
 - Pork: Ham and shoulder marking, ribbing and chine bone removal.
- Lightweight and flexible - allows operators to use the tool both hanging and on the table.
- More power - high efficiency air motor for more horsepower and lower operating costs.
- Heavy duty gears made to withstand all uses in the meat packing industry.
- New style USDA approved blade guard for easy internal sanitation.
- All stainless construction.
- Lever style adjustable depth gauge for precise depth control.
- Meets national and international requirements for hygiene and safety. USDA and CE approved.

Specifications

SPC-140 / SPC-165

| | | | |
|-----------------------------|---------|---------------------------|----------------------------|
| Drive | | | Pneumatic |
| Motor Power | | 630 W | 0.85 hp |
| Operating Pressure | | 6.2 bar | 90 psi |
| Air Consumption | | 0.77 m ³ / min | 27.3 ft ³ / min |
| Blade Speed | | | 1775 rpm |
| Control Handle | | Single / Dual Trigger | Pneumatic |
| Blade Diameter | SPC-140 | 140 mm | 5.5 in |
| | SPC-165 | 165 mm | 6.5 in |
| Cutting Depth (maximum) | SPC-140 | 38.1 mm | 1.5 in |
| | SPC-165 | 50.8 mm | 2.0 in |
| Overall Length | | 419 mm | 16.5 in |
| Weight | | 2.65 kg | 5.85 lbs |
| Vibration | | 1.26 m / sec ² | 122 dB |
| Noise (one meter from tool) | | | 88 dB |

Equipment Selection and Accessories

SPC-140 / SPC-165

| | | | Order Number |
|--|---------|---|--------------|
| SPC-140 | | | 4001027 |
| SPC-140 with Ergo Handle | | | 4001038 |
| SPC-165 | | | 4001028 |
| SPC-165 with Ergo Handle | | | 4001039 |
| SPC-165 Dual Triggers, 115V Control | | | 4001079 |
| SPC-165 Dual Triggers, 230V Control | | | 4001101 |
| Air Hose | | | 3059018 |
| Air Filter / Regulator / Lubricator | | | 3022003 |
| Blades | SPC-140 | 140 mm / 5.5 in diameter blade - 120 teeth | 1023362 |
| | | 140 mm / 5.5 in diameter blade, skip tooth blade - 60 teeth | 1023363 |
| | SPC-165 | 165 mm / 6.5 in diameter blade - 140 teeth | 1023324 |
| | | 165 mm / 6.5 in diameter blade, skip tooth blade - 60 teeth | 1023308 |
| Optional: | | | 1019197 |
| Balancer | | | 4042033 |
| Complete Assembly Tool Kit | | | 8039162 |